

SPECIFICATIONS

Electrical Ratings	Switch: 25mA @ 24VDC Carry: 100mA @ 24VDC
Electrical Life	2,000 cycles typical
Contact Resistance	< 25 mΩ initial
Actuation Force	800 gF max
Actuator Travel	2.0 mm
Dielectric Strength	500Vrms min
Insulation Resistance	> 100MΩ min
Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C




MATERIALS ←RoHS COMPLIANT

Actuator	PBT, UL94V-0, White
Cover	PBT, UL94V-0, Red
Housing	PBT, UL94V-0, Black
Contacts	Phosphor Bronze, Gold over Nickel Plated
Terminals	Phosphor Bronze, Gold over Nickel Plated

ORDERING INFORMATION



Series:	KR	06	R	T
KR				
Number of Positions:				
01 = 1 positions				
02 = 2 positions				
03 = 3 positions				
04 = 4 positions				
05 = 5 positions				
06 = 6 positions				
07 = 7 positions				
08 = 8 positions				
09 = 9 positions				
10 = 10 positions				
12 = 12 positions				
Actuator Height:				
E = Extended				
R = Recessed				
Tape Seal:				
Blank = No Tape Seal				
T = Tape Seal				

DIMENSIONS

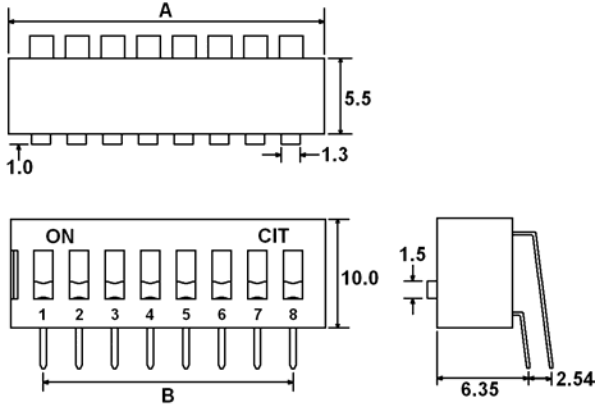


Number of Positions	"A" mm	"B" mm
01	3.84	-
02	6.80	2.54
03	9.34	5.08
04	11.90	7.62
05	14.40	10.16
06	16.90	12.70
07	19.50	15.24
08	22.15	17.78
09	24.60	20.32
10	27.25	22.86
12	32.30	27.94


SCHEMATIC & PC LAYOUT

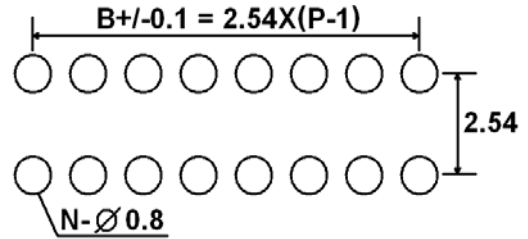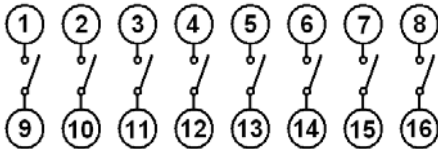

ACTUATOR OPTIONS



E ACTUATOR



**Recessed Actuator
R ACTUATOR**

PACKAGING SPECIFICATIONS

All switches packaged in OFF position
 Tube packaging standard